



GLOBAL LEADER PROVIDING
PERFORMANCE FLUIDS & LUBRICANTS

TECHNICAL DATA SHEET

TMC-49 SPECIALTY FLUID

TMC-49 is a two-phase immersion cooling liquid.

PRODUCT INFORMATION

TMC-49 Specialty Fluid is a two-phase coolant designed for use in data centers and for cleaning electronic products. It is highly effective for immersion cooling due to its excellent thermal stability and efficacy of heat radiation. TMC-49 is non-flammable, insoluble in water, and not hazardous to human health. TMC-49 is a hydro-fluoroolefin (HFO) dielectric fluid with zero ozone depletion potential (ODP) and a very low global warming potential (GWP) of 20.

FEATURES

- No Flash Point
- Non-Flammable
- ODP of 0
- GWP of 20

APPLICATIONS

- Heat Transfer Agent for Industries Like Data Mining
- Two-Phase Coolant
- Data Centers
- Supercomputing Centers
- Energy Storage Power Centers
- Cleaning Agent for Electronic Products or Electric Parts

TMC-49 is a high-performance, two-phase, closed-loop liquid cooling solution designed for processors with extreme power demands (2500W+). It uses direct-to-chip cooling with a waterless heat transfer fluid, eliminating risks of leaks or corrosion while efficiently extracting and dispersing heat. Scalable for new or retrofitted data centers, it supports computing power of 120 kW and above, with a single cabinet handling up to 160 kW of heat dissipation. Power consumption is reduced from 12 kW to 9 kW.

Power usage effectiveness (PUE) is less than 1.1 of TC4600E-LP server by Sugon, whose power density of a single cabinet is 160kW.

TMC-49 two-phase coolant has been successfully applied for supercomputing and internet data centers (IDCs).



PHYSICAL & ENVIRONMENTAL PROPERTIES

PROPERTY	UNITS	TMC-49
Form	—	Liquid
Color	—	Colorless
Odor	—	Odorless
Purity	—	≥99.0%
Water Content	ppm	≤100
Boiling Point	°C	47
Pour Point	°C	115
Dielectric Constant	—	188
Dielectric Strength	kV	43.4
Freezing Point	°C	-80
Latent Heat of Vaporization	kJ kg ⁻¹	93.22
Vapor Pressure (20°C)	kPa	36
Kinetic Viscosity	cSt	0.373
Critical Temperature	K	443.3
Critical Pressure	kPa	2.205
Liquid Density	g/cm ³	1.6
Liquid Viscosity	mm ² /s	0.3562
Surface Tension	mN/m	11.44
Liquid Thermal Conductivity	W·m ⁻¹ ·K ⁻¹	0.0609
Volume Resistivity	Ω·m	3.070x10 ¹⁵
Ozone Depletion Potential (ODP)	—	0
Global Warming Potential (GWP)	—	20
Flash Point	—	None


Not for specification purposes. All values @ 25°C unless otherwise specified.

PERFORMANCE

PARAMETER	UNITS	RESULTS
Vapor Pressure at Saturation Temperature, ASTM E 1719	psia	14.73
Viscosity, Kinematic, ASTM D 445.a		
@ 16°C	cSt	0.395
@ 18°C	cSt	0.387
@ 21°C	cSt	0.376
@ 24°C	cSt	0.365
@ 27°C	cSt	0.354
@ 29°C	cSt	0.348
@ 32°C	cSt	0.338
@ 35°C	cSt	0.328
@ 40°C	cSt	0.312
@ 45°C	cSt	0.297
Density of Liquids by Digital Density Meter, ASTM D 4052		
@ 16°C	g/cm ³	1.6313
@ 21°C	g/cm ³	1.6142
@ 27°C	g/cm ³	1.5969
@ 32°C	g/cm ³	1.5790
@ 35°C	g/cm ³	1.5702
@ 38°C	g/cm ³	1.5610
@ 40°C	g/cm ³	1.5515
@ 43°C	g/cm ³	1.5427
@ 46°C	g/cm ³	1.5336
@ 49°C	g/cm ³	1.5241


PERFORMANCE — HEAT CAPACITY

TEMPERATURE (°C)	HEAT CAPACITY, ATSM D 7896 (kJ/kg·K)
-20	0.705
0	0.729
20	0.754
40	0.778
60	0.802
80	0.826
100	0.850

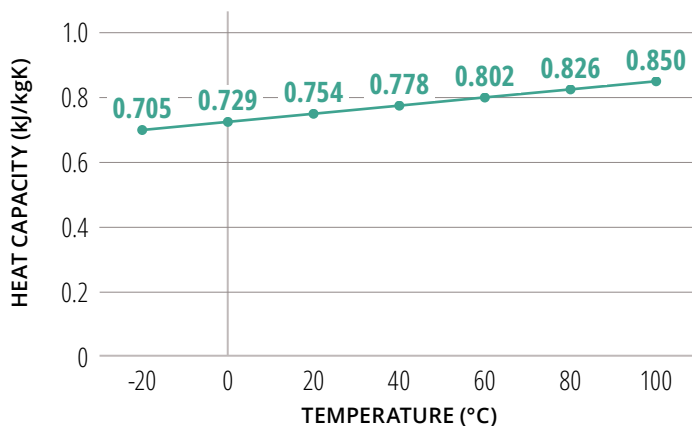


PERFORMANCE — THERMAL CONDUCTIVITY

TEMPERATURE (°C)	THERMAL CONDUCTIVITY, ATSM D 7896 (W/m·K)
-20	0.072
0	0.069
20	0.066
40	0.063
60	0.060
80	0.057
100	0.054

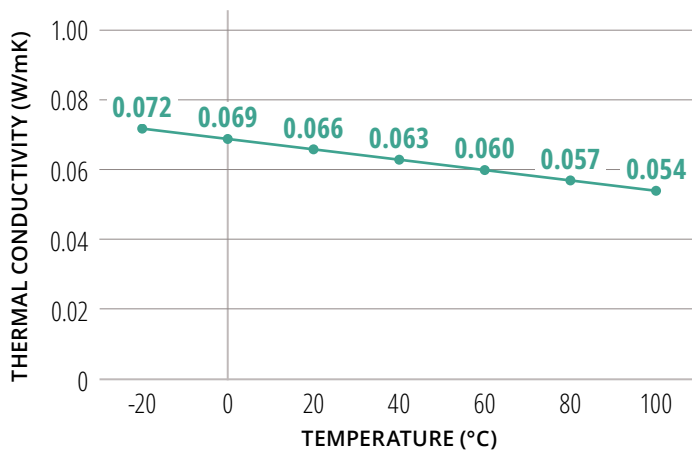


PERFORMANCE — VAPOR PRESSURE

TEMPERATURE (°C)	VAPOR PRESSURE OF LIQUIDS BY EBULLIOMETRY, ASTM E 1719 (kPa)
-20	4.069
0	12.26
20	31.78
40	72.94
60	151.5
80	289.7
100	516.8

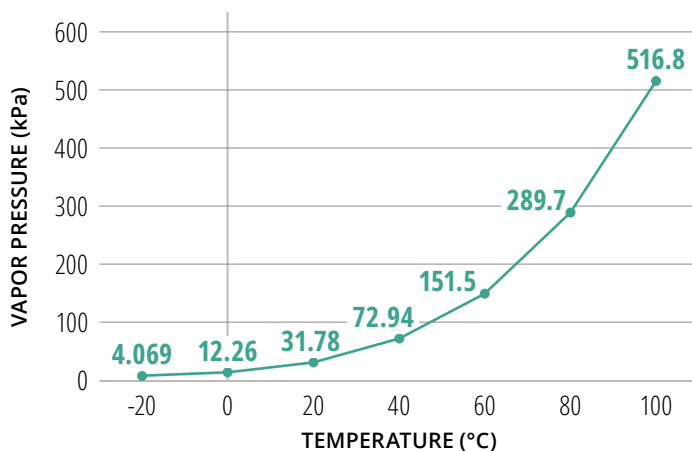

PERFORMANCE — DENSITY OF LIQUIDS

TEMPERATURE (°C)	DENSITY OF LIQUIDS BY DIGITAL DENSITY METER, ATSM D 4052 (g/cm ³)
-20	1.7488
0	1.6836
20	1.6184
40	1.5532
60	1.4880
80	1.4227
100	1.3575

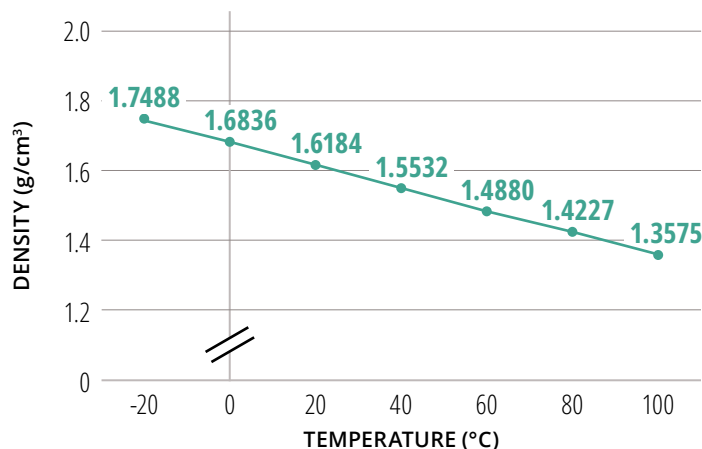

PERFORMANCE — BOILING RANGE DISTRIBUTION

BOILING RANGE DISTRIBUTION @ ATMOSPHERIC PRESSURE ASTM D 86

	RESULTS (°F)
Initial Boiling Point	116
5% Recovered	118
10% Recovered	118
15% Recovered	118
20% Recovered	118
25% Recovered	118
30% Recovered	118
35% Recovered	118
40% Recovered	118
45% Recovered	118
50% Recovered	118
55% Recovered	118
60% Recovered	118
65% Recovered	118
70% Recovered	118
75% Recovered	118
80% Recovered	118
85% Recovered	118
90% Recovered	118
99% Recovered	120

MATERIALS COMPATIBILITY

Compatible Materials

METALS

Aluminum (Al)	Copper (Cu)
Zinc (Zn)	Gold (Au)
Nickel (Ni)	Alloys (Au/Sn/Ni)
Stainless Steel (304L, 316L)	Lead Tin Alloy
White Copper	Purple Copper
Brass	Titanium

PLASTIC (Plasticizer less than 5%)

Polyethylene (PE)	Fiberglass Board
Polystyrene (PS)	Polyimide (PI)
Polyester (PET, PBT)	Nylon (PA66, PA9T, NA66)
Polyether Sulfone (PES)	Polytetrafluoroethylene (PTFE)
Liquid Crystal Polymer (LCP)	Polylactic Acid (PLA)

RUBBER

Silicone Rubber
Chlorosulfonated Polyethylene (Heparin, CSM)
Chloroprene Rubber (CR)

ADHESIVES

UV Adhesive	SR Adhesive
Thread Fastener Adhesive	Bare Wire Adhesive
ABS Adhesive Material	

OTHER

Epoxy Resin (EO)
ABS Resin

Incompatible Materials

ALKALI METALS

Lithium (Li)	Sodium (Na)
Potassium (K)	Rubidium (Ru)
Cesium (Se)	

ALKALINE EARTH METALS

Beryllium (Be)	Magnesium (Mg)
Calcium (Ca)	Strontium (Sr)
Barium (Ba)	

MATERIAL WITH CERTAIN RISKS

EPDM	Hydrogenated Nitrile Rubber (HNBR)
NBR	Polyurethane (PU)
Acrylic (PMMA)	Polychlorinated Trifluoroethylene (PCTFE)
Polyvinyl Chloride (PVC)	Plasticizer content more than 5%
Soft Polytetrafluoroethylene (PTFE)	
IIR	

PACKAGING

TMC-49 is available in the following sizes and weights:

- **1 Gallon Jug** — 12 lb / 5.4 kg
- **5 Gallon Pail** — 40 lb / 18.1 kg
- **55 Gallon Drum** — 550 lb / 250 kg
- **Sample** — 2.2 lb / 1 kg
- **275 Gallon Tote** — Available Upon Request

SHELF LIFE & STORAGE

Shelf life is 5 years from the date of manufacture when stored in the original packaging materials and stored under normal conditions. TMC will re-certify material every 5 years up to 20 years.

DISPOSAL & RECYCLING

This fluid can be recycled and reused. Help protect the environment and don't pay for expensive disposal services.

TMC Industries can reclaim your used fluorinated fluids, restoring them to like-new condition, and save you up to 50% in replacement fluids while protecting the environment.

TMC Reclaimed Fluids are tested to meet new product specifications. It will be clear and odorless, and a Certificate of Analysis is issued with every order.

TMC Industries offers a **100% satisfaction guarantee** on all our reclaimed fluids. We back this up with a no-questions-asked refund policy. To learn more, [click here](#).

EXTERNAL DOCUMENTS

- [3rd Party Laboratory Testing: Non-Detectable PFAS](#)
- [TMC Used Fluid Reclamation Service Brochure](#)

Safety and Handling: Before using this product, please thoroughly read the current product SDS and label, following all applicable safety precautions described therein (e.g., recommended storage and safe handling, appropriate exposure controls and personal protective equipment (PPE), addressing accidental spills, disposal considerations, etc.).

Safety Data Sheet: Consult Safety Data Sheet before use.

Regulatory: For regulatory information about this product, contact your TMC representative.

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that TMC believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond TMC's control and uniquely within user's control can affect the use and performance of a TMC product in a particular application. Given the variety of factors that can affect the use and performance of a TMC product, user is solely responsible for evaluating the TMC product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable TMC product packaging or product literature, TMC warrants that each TMC product meets the applicable TMC product specification at the time TMC ships the product. TMC MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE

OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OR TRADE. If the TMC product does not conform to this warranty, then the sole and exclusive remedy is, at TMC's option, replacement of the TMC product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, TMC will not be liable for any loss or damage arising from the TMC product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.